Truck Crane AK 52

As 3- and 4-axle chassis



Technical Data

Permissible gross vehicle weight (t)	26 / 32
Max. payload (kg)	3,000 (optional 6,000/12,000)
Max. extension length (m)	52.0 (optional 55.0)
Working height up to jib (m)	38.0
Jib extendable (m)	6.3 / 10.3 / 14.3
Jib payload (kg)	3,000 / 2,000 / 1,000
Boom angle (degrees)	85
Jib angle (degrees)	157
Pivoting range (degrees)	endless
Hook speed (m/min)	50
Range for crane operation at 500 kg (m)	40.0
Range for crane operation at 1 t (m)	34.0
Range for crane operation at 2 t (m)	22.0
Range for crane operation at 3 t (m)	17.0
Range for crane operation at 6 t (m)	10.0
Range for crane operation at 12 t (m)	5.0
Range / Working height max. (m) with rotating basket 250 kg (PK 250-D) with rotating basket 350 kg (PK 350-D) with rotating basket 600 kg (PK 600-D)	37.5 / 53,0 33.0 / 51.0 30.0 / 51.0
Range / Working height max. (m) with non-rotating basket 250 kg	37.5 / 53.0




The Böcker AK 52 sets new standards in the class of 26 t trucks as 3-axle and in the 32 t class as 4-axle. Lifting 3,000 kg to a sensational radius of 17 m with a height of 31 m it is most likely the strongest crane in an aluminium-steel design which is currently available on the market.

The AK 52 also reaches new heights when being used as a working platform. Its extendable cage with a width of 3.5 meters it impresses with a load capacity of up to 600 kg. Thanks to its small slewing radius, its highly-modern closed hybrid-telescope boom and its fully-hydraulic, telescopic fly jib of 14 m it is perfect for your job site even when working in tight spaces!


Available with BöckerConnect



All rights reserved for changes. All specified values are maximum values.

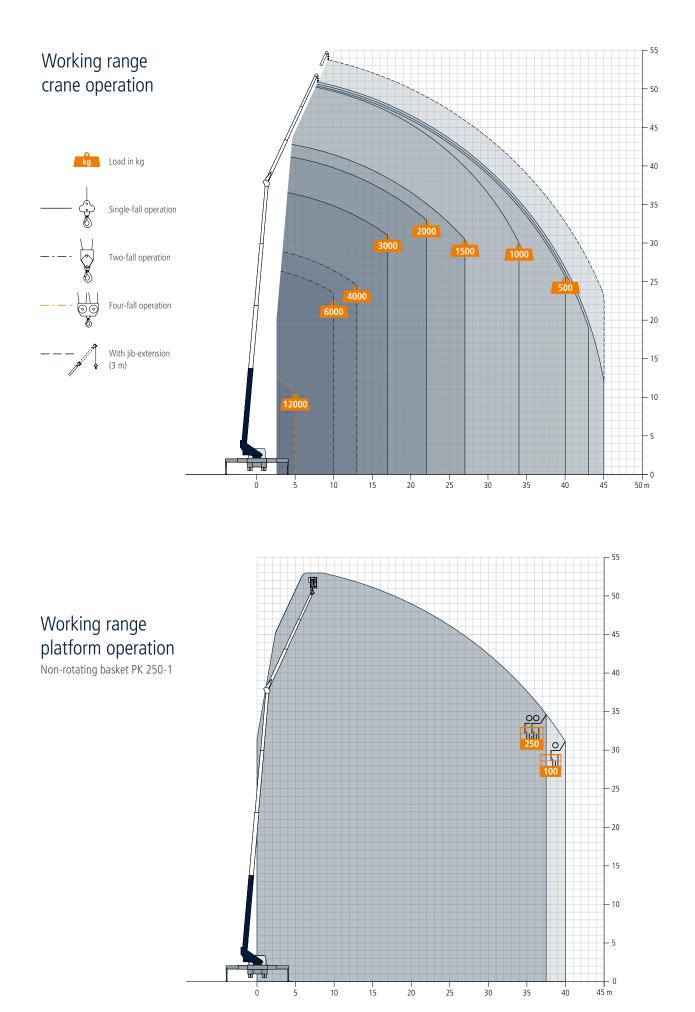



All weights are in kg. Measurements can fluctuate slightly.

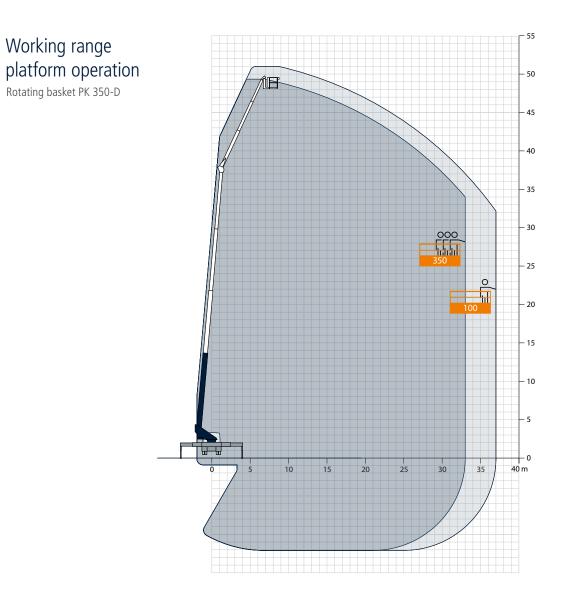

Jib



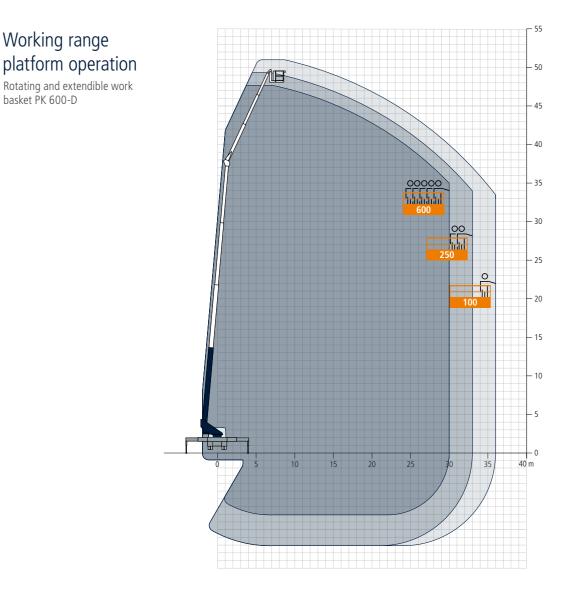

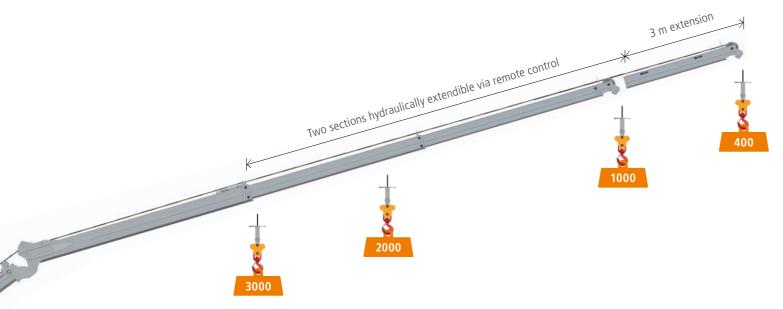

Working range

All weights are in kg. Measurements can fluctuate slightly.

Dimensions

4-axle chassis

